

Update Software:

Aura Software Link vs 3.99

Vs 3.99

2021

Drink Programming and other settings are retained after update

See important note about pressure below

Prepare the USB

Name Brand USB 8GB or smaller must be completely blank and formatted

Insert USB and locate in File Explorer

Right click on icon and select *Fat32 & quick format. Rename if desired.*

Place software on USB

Insert and open USB

Copy & Paste the software file onto the USB (file will look like this: ARIMA-3.99.BIN)

Rename file: ARIMA.BIN (file must always be named ARIMA.BIN regardless of version)

ARIMA.BIN must be the only thing on the software!

Right click USB icon and select Eject before removing.

Update Machine

Switch OFF (pos 0)

Remove left side panel

Inset USB into port on top side of CPU

Switch ON (pos 1 or 2)

Wait 30 seconds

Switch OFF and remove USB

Replace left side panel

Switch ON to verify new version displays on startup

Check These Important settings!

PrS Steam pressure


Setting will revert to OFF after update. Machine will not heat!

Enter programming and set to ON, then set to desired pressure.


Enter Programming

AURA

There are 2 steps to unlock the Programming Mode

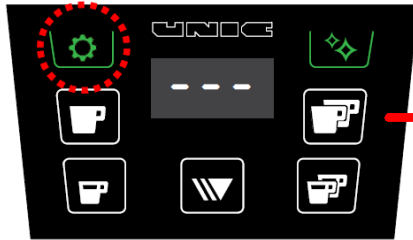

Programming Mode:
Press & Hold the GEAR button
for 3 seconds

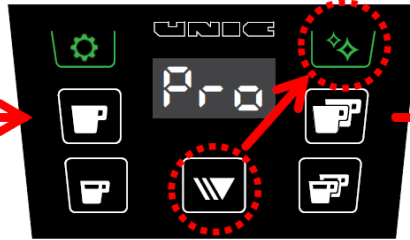

Display: Pro
Press the cleaning and
continuous buttons



Display: do (dose)
First item in the
programming list


*Press & hold the continuous button first, then the cleaning button
Hold both for 3 seconds*

Adjust Steam Pressure

AURA




Scroll to Pressure and
press Stars to enter

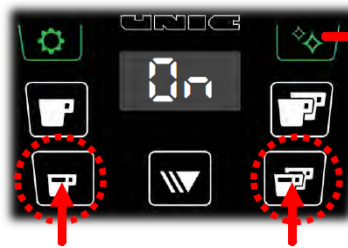

Toggle between
OFF & ON if needed
Normal setting is ON



When "ON"
Press Stars to
enter
Programming

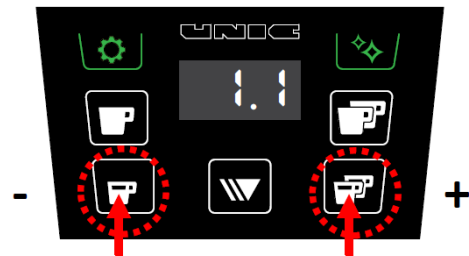

Adjust bar setting
with lower keys




Press & Hold the GEAR button on
G1 for 3 seconds to Save and Exit

Switch SteamAir ON or OFF

St message when
SteamAir not installed
or probe disconnected



Scroll to StA and press
Stars to enter

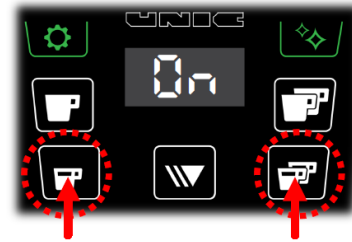

Toggle between
OFF & ON if needed
default setting is ON



Press & Hold the GEAR button on G1 for
3 seconds to Save and Exit